WORKSTATION

Images may include options

Automatic Coverstitch Bottom Hemmer

Shirts may be tubular or with side seams

- Patented Serial Bus Control System
- Shirt may be hemmed first or last operation
- Tandem operation
- Automatic size control
- Perfectly aligned over-sew
- Electronic active edge guiding system
- 100% cotton thread max RPM

DESCRIPTION


An electronically controlled workstation for hemming circular shirt bottoms. This unit incorporates a two-needle coverstitch sewing head with an optional left-hand knife with electro-pneumatic expansion rollers for size control, a state-of-the-art edge guiding system, a fabric folding system, and an automatic stacker.


OPERATION

A tubular or side-seamed body is loaded over the expansion rollers. When loaded, the rollers expand to the proper tension, indexes the shirt under the presser foot, and the sewing cycle is initiated. The operator is free to load a second station. The finished hem is sensed and perfectly oversewn (with stitch-condensing if desired). The threads are trimmed and the garment is automatically stacked.


OPTIONS

Stitch condenser Left-hand knife Top or bottom coverstitch Flip seam device Side seam recognition



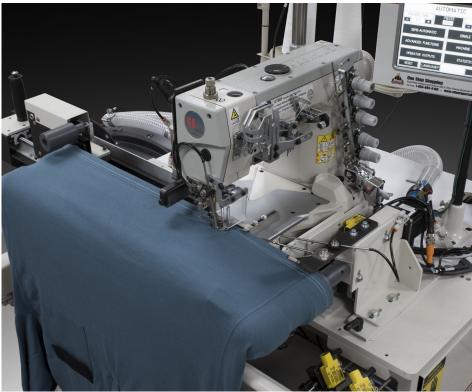





Plain Hem w/Bottom Cover

Plain Hem w/Top & Bottom Cover

SPECIFICATIONS	
Voltage (v/ph/hz)	220v 1ph
Current (amps)	6.5
Air pressure (psi)	90
Air consumption (cfm)	15
Shipping weight (lbs)	1079
Shipping dimensions (w/l/h, inch)	60 x 54 x 60
PRODUCTION	
Pieces per hour	660

Depending on material and size of parts, based on tandem setup

www.atlatt.com • sales@atlatt.com

+1 (770) 963-7369 • FAX +1 (770) 963-7641